


KV707X




VSM NON-WOVEN

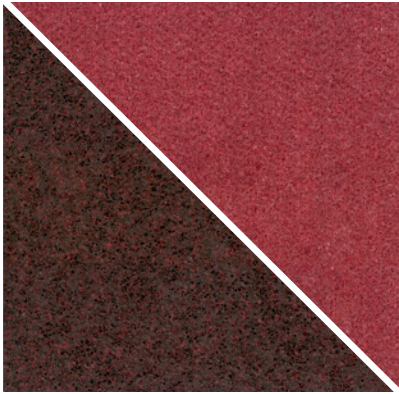


| | |
|-------------------------|--|
| Grain type | Aluminium oxide / Silicon carbide |
| Bonding | Full-resin bonded |
| Colour | Coarse = Brown (AO) Medium = Red (AO) Fine = Blue (AO) Very fine = Grey (SIC) |
| Backing | X-Polyester |
| Flexibility | Sturdy |
| Production width | 1,000 mm |

Materials



Features



Surface Conditioning material on a sturdy polyester backing for improving surface finishes, deburring, rust removal, cleaning, removal of scatter marks and paint coats. Special features are a very long service life, a uniform scratch pattern, good adaptability and no clogging.

AO = Aluminium oxide SIC = Silicon carbide

Fineness range:¹⁾



Benefits

- > Ideal for calendering sheet metal plates on wide-belt sanding machines
- > Uniform surface finish
- > Good adaptability
- > Extremely long service life
- > No clogging
- > Low extensibility
- > Waterproof

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG

Siegmundstraße 17 · 30165 Hanover · Germany
T +49 511 3526 479 · F +49 511 3521 315
sales@vsmabrasives.com · www.vsmabrasives.com



¹⁾ Other fineness degrees upon request. Subject to technical changes.